

Balance Beam

FSW215



Item no. FSW21500-0900

General Product Information

Dimensions LxWxH 533x317x45 cm

Age group 13+

Capacity (users) 3

Colour options 



In addition to running, jumping, climbing, crawling, balancing should always be a part of a challenging obstacle course. The balance beam is divided into three sections with increasing degrees of difficulty. The real dare devils can make the exercises even more difficult by balancing backwards. The surface of the Balance Beam is made from Ekogrip®

panels with a top-layer of thermoplastic rubber, this has a non-skid effect for comfortable and safe training at all weather circumstances.



Balance Beam

FSW215



Post are made of Ø101.6 x 2mm, pre-galvanized carbon steel and powder coated, a great protection to all conditions.



The connectors are made of die-cast aluminium, specially alloyed for the outdoor environments and heavy usage. The screws attaching the connectors are stainless steel and protected by zinc washers.



The bars intended for exercises are made of hot-dip galvanised steel ø48mm. The diameter of these bars provide a good support when used to for push ups exercises or when doing exercises standing on the tubes.



All KOMPAN fitness products are compliant with the ASTM F3101 & EN16630 Outdoor Fitness Standards. Load tests are performed as a static test by adding dynamic factors as well as safety factors to the specified load of 78kg per user. A product intended for 1 user is loaded with 420kg.



The information sign is made of a PA6 (Polyamide) and shows the most relevant exercise and a QR code. When scanned the QR code will link to an animated illustration of the exercise and offers the possibility of downloading the KOMPAN sport & fitness App, which will provide a large amount of exercises and workouts.



The surface is made of Ekogrip™ panels, consisting of 15mm polyethylene with a 3mm top-layer of thermoplastic rubber. The Ekogrip™ panels have a non-skid effect for comfortable and safe training at all weather circumstances.

Item no. FSW21500-0900

Installation Information

Max. fall height	40 cm
Safety surfacing area	28,0 m ²
Numbers of installers (persons)	2
Total installation time	3.7
Excavation volume	0,11 m ³
Concrete volume	0,00 m ³
Footing depth (standard)	90 cm
Shipment weight	94 kg
Anchoring options	In-ground ✓ Surface ✓

Warranty Information


EcoCore HDPE	Lifetime
Post	10 years
HDG structural parts	Lifetime
Connectors	10 years
Spare parts guaranteed	10 years

Balance Beam


FSW215

* Max fall height | ** Total height | *** Safety surfacing area

* Max fall height | ** Total height

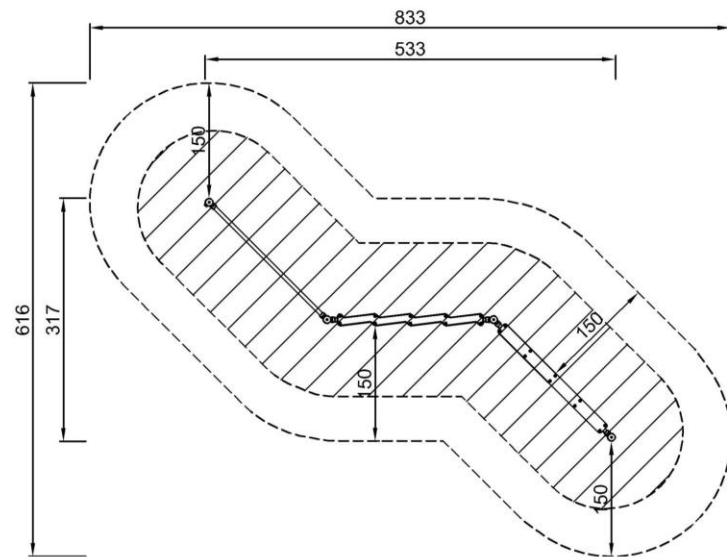

FSW21500
*40cm
**45cm
***28m²



[Click to see 1:100 ratio TOP VIEW](#)