

# Combi 5



FSW105

**KOMPAN**  
Let's play



Item no. FSW10501-0901

## General Product Information

Dimensions LxWxH	691x444x240 cm
Age group	13+
Capacity (users)	14
Colour options	 



See KOMPAN Fit app for more



With 10 different workout stations in one, this combination package offers a superior street workout and callisthenics experience. Featuring all the essential elements for users to release their creativity, the dimensions of the pull up bars have been optimized to 32mm for the best possible hand grip. The strength of the bar is secured through a conical design and a full


steel bar. The 138cm wide pull up bars are designed to give plenty of space to dynamic exercises and promote sideways exercises such as the typewriter pull up. The wide bars also allow for users to do pull ups next to each other and thereby compete or motivate each other.



Data is subject to change without prior notice.

# Combi 5

FSW105

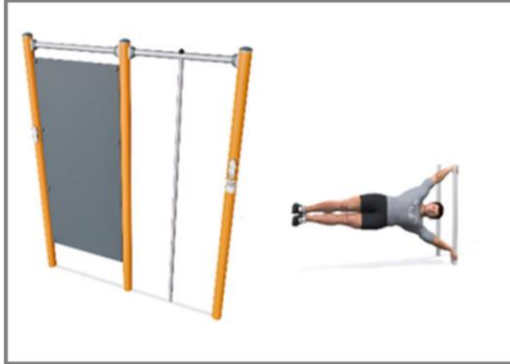

The vertical pole is made of a  $\varnothing 38 \times 2$ mm hot dip galvanised tube, the perfect size for a good grip when you try to do the Human Flag!



Steps are made of extruded aluminium with a non-skid surface. Aluminium has high corrosion resistance and ensures durability of the product. Steps have been mounted at heights of 34,7cm and 54,7cm this creates an easy access to reach the overhead activity



All bars intended for pull ups are made of solid,  $\varnothing 32$ mm x 138 m, hot dip galvanised, S235JR steel bars. This diameter gives the right grip for everyone.



The handles offer 4 different heights to place the hands or feet; 48cm, 76cm, 104cm and 132cm, creating the opportunity to scale the difficulty of the exercise.



Post are made of  $\varnothing 101.6 \times 2$ mm, pre-galvanized carbon steel and powder coated, a great protection to all conditions.



The surface is made of Ekogrip™ panels, consisting of 15mm polyethylene with a 3mm top-layer of thermoplastic rubber. The Ekogrip™ panels have a non-skid effect for comfortable and safe training at all weather circumstances.

Item no. FSW10501-0901

### Installation Information

Max. fall height	233 cm
Safety surfacing area	59,6 m <sup>2</sup>
Numbers of installers (persons)	2
Total installation time	11.1
Excavation volume	0,49 m <sup>3</sup>
Concrete volume	0,18 m <sup>3</sup>
Footing depth (standard)	90 cm
Shipment weight	559 kg
Anchoring options	In-ground ✓ Surface ✓

### Warranty Information



HDG structural parts	Lifetime
Post	10 years
Connectors	10 years
EcoCore HDPE	Lifetime
Spare parts guaranteed	10 years

# Combi 5

FSW105

\* Max fall height | \*\* Total height | \*\*\* Safety surfacing area

\* Max fall height | \*\* Total height

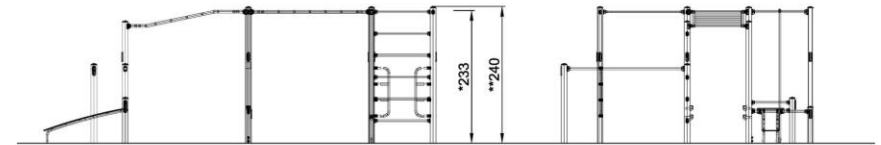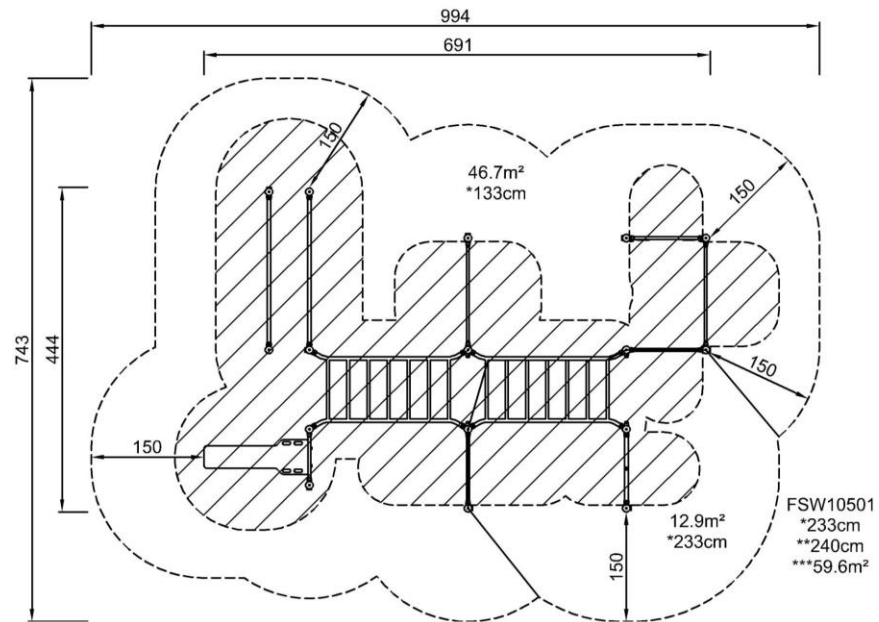

FSW10501  
1:100

[Click to see 1:100 ratio TOP VIEW](#)